



6" HORIZONTAL RETRO SYSTEM DOUBLE LAMP DOWNLIGHT



Clear Alzak®

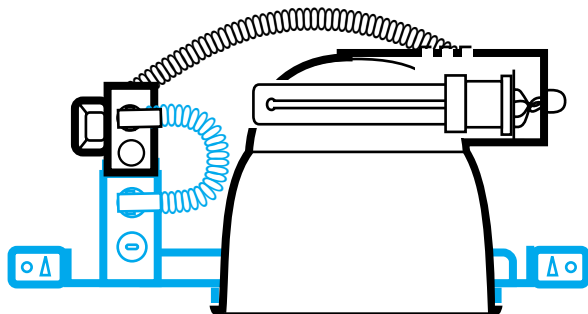

Gold Alzak®



Black Baffle

SPECIFICATION INFORMATION

RETRO SYSTEM

Installs into existing downlights mounting frame, J-box, and mounting hardware. Consists of precisely designed reflector; lampholder with socket, flex, cap and wire; and ballast attached to J-box. (Voltage options must be specified). Accessory mounting clips are not required for all installations, however when needed specify mounting clip MC from accessories column. (see Clip spec page for further information).

REFLECTOR

Reflector is available in thirty degree cutoff .30 for general illumination. Finishes are Clear A and Gold G Alzak for anodized, specular, durable and anti-iridescent reflectors.

BALLAST

Enclosed F-can, class P, HPF is securely fastened to 2" box, which mounts to existing fixtures frame. Supplied standard in 120V and 277V. Electronic ballasts use 4 pin lamps and provide rapid start, .98 power factor with THD<10%. Outboard mounting provides quiet cool operation. Dimming ballast D3 controls lumen output down to ±5% and is available in 26, 32, 42 watts only; compatible with incandescent dimmers. Consult ballast spec page for further details.

ELECTRICAL

Allows 4-in / 4-out #12 AWG conductors rated at minimum 90° C. For use in damp locations. J-box and ballast are accessible through fixture. U.L. Classified for fluorescent retro-fits

ACCESSORIES

AL acrylic security lens
 B black baffle
 D3 dimming ballast
 G gold Alzak reflector
 JM / UM J-box mount (see options)
 MC1 mounting clips for high hat style housings like H7, R10 and MX7.
 MC2 mounting clips for die cast plaster frames.
 MC4 bottom feed clips.
 MC5 slide clips for flat plaster frames.
 MC6 bottom feed clips for die cast aluminum mounting frames.
 OT6 white oversize trim ring
 P trim flange painted white
 QC quick connect screw-in cap
 RP remodel pan

ORDERING INFORMATION

LAMP

2-9 9 watt quad tube
 2-13 13 watt quad tube
 2-18 18 watt quad tube
 2-26 26 watt quad tube

120V HPF

RH6209.A30.1 9 watt quad tube
 RH6213.A30.1 13 watt quad tube
 RH6218.A30.1 18 watt quad tube
 RH6226.A30.1 26 watt quad tube

120V ELECTRONIC

RH6213.A30.1E 13 watt quad tube
 RH6218.A30.1E 18 watt quad tube
 RH6226.A30.1E 26 watt quad tube

277V HPF

RH6209.A30.2 9 watt quad tube
 RH6213.A30.2 13 watt quad tube
 RH6218.A30.2 18 watt quad tube
 RH6226.A30.2 26 watt quad tube

277V ELECTRONIC

RH6213.A30.2E 13 watt quad tube
 RH6218.A30.2E 18 watt quad tube
 RH6226.A30.2E 26 watt quad tube

SUBMITTAL INFORMATION

TYPE:

PROJECT:

NOTES:

DESCRIPTION:

DELRAY
LIGHTING
 INCORPORATED

RH6200

11916

VALERIO ST.

NORTH

HOLLYWOOD,

CALIFORNIA

91605

PHONE

818 982 3701

FAX

818 982 3715